


MINI SYSTEM


APPLICATIONS: HOUSING ESTATES, PEDESTRIAN WALKWAYS, SQUARES, CAR PARKS, ACCESSES

Channels specially designed for areas with limited height, such as reinforced slabs and floors of garages, basements, showers, changing rooms, inverted roofs, etc.


Channels from 5 cm. (MINIKIT model) to 15 cm. in height. All types of grating, materials (cast iron, galvanized steel, stainless steel, etc.) and load classes up to C 250 available.




M200



M200K



M300

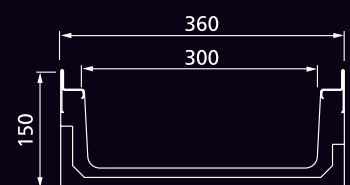


M300K

MINIKIT

LOAD CLASS
UP TO A15
EN-1433 STANDARD

ULMA Linear Drainage Channel type MINIKIT: External width 120mm; Internal width 98mm and overall height 50mm to collect rainwater in 1 metre long units. Locking system "click" type without screws.

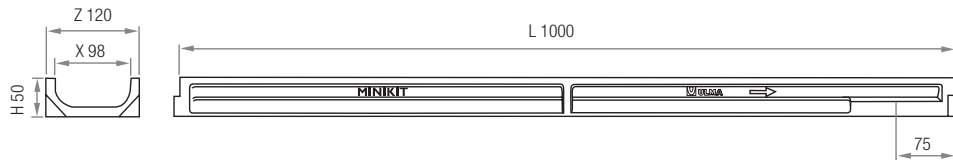

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
MINIKIT	1000	50	120	98	110	-	34	126 (with grating)

*Vert. outlets on order.

Slotted




GRATING

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Units (x LM)
GALVANIZED STEEL	SLOTTED	A15	GNS100UOA	1000	120	3	1

LOCKING SYSTEM

CLICK. Without screws.



ACCESSORIES


END CAPS	Closed
Code	Type
TMINIKITC	CLOSED



M100

LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type M100: External width 130mm; Internal width 100mm and overall height 60mm to collect rainwater in 1 metre long units. Locking system consists of 2 screws per metre.

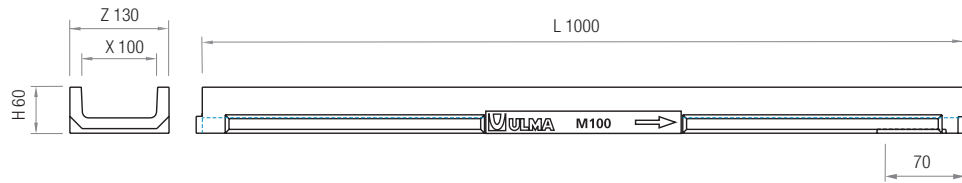

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M100	1000	60	130	100	90	-	40	120


*Vert. outlets on order.



GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	B125	FNX100UCBM	500	130	6	2
	SLOTTED	C250	FNX100UCCM	500	130	7	2
GALVANIZED STEEL	SLOTTED	A15	GN100UCA	1000	130	3	1
	SLOTTED	A15	GN100UOA (1)	1000	130	3	1
	PERFORATED	A15	GP100UCA	1000	130	3	1
STAINLESS STEEL	SLOTTED	A15	IN100UCA	1000	130	3	1
	PERFORATED	A15	IP100UCA	1000	130	3	1

(1) Without screws.



LOCKING SYSTEM

SCREW LOCKING SYSTEM. 2 screws per metre.



SUMP UNITS AND ACCESSORIES TABLE

AEUR0100

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet / (mm)		Sump Units	Bucket
				Lateral	Front		
AEUR0100	500	300	130	90/110	90	1	CEUR0100

END CAPS	
Code	Type
T100MC	CLOSED

GALVANIZED STEEL BUCKET	
Code	
CEUR0100	


M100K

LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type M100K: External width 130mm; Internal width 100mm and overall height 80mm to collect rainwater in 1 metre long units. Integrated galvanized steel* edges for lateral protection. Locking system consists of 2 screws per metre.

*Also available with stainless steel edge protection.

MINI

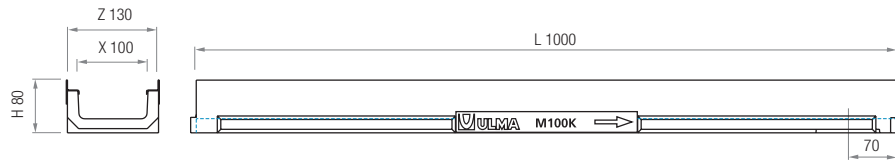

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M100K	1000	80	130	100	90	-	40	120

*Vert. outlets on order.

Slotted Slotted Slotted Perforated Mesh




GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX100KCCM	500	123	2
	HEELPROOF SLOTTED	C250	FNHX100KCCM	500	123	2
GALVANIZED STEEL	PERFORATED	A15	GP100KCA	1000	123	1
	SLOTTED	A15	GN100KCA	1000	123	1
	MESH	B125	GEX100KCB	1000	123	1
STAINLESS STEEL	SLOTTED	A15	IN100KCA	1000	123	1
	PERFORATED	A15	IP100KCA	1000	123	1
	MESH	B125	IEX100KCB	1000	123	1

LOCKING SYSTEM

SCREW LOCKING SYSTEM. 2 screws per metre.



SUMP UNITS AND ACCESSORIES TABLE

AEURO100K

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AEURO100K	500	318	130	90/110	90	1	CEURO100

END CAPS

Closed



Code	Type
T100MKC	CLOSED

GALVANIZED STEEL BUCKET

Code


CEURO100



M100V


LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type M100V: External width 155mm; Internal width 100mm and overall height 80mm to collect rainwater in 1 metre long units. Locking system consists of 2 screws per metre.

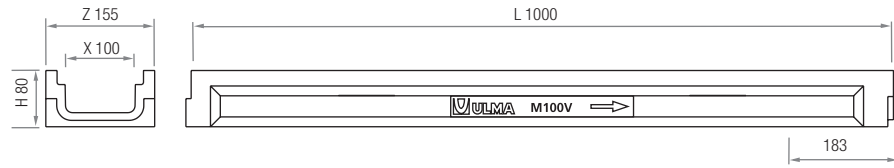

Channel	L (mm)	H (mm)	Width (mm)		Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M100V	1000	80	155	100	90	-	40	120

*Vert. outlets on order.

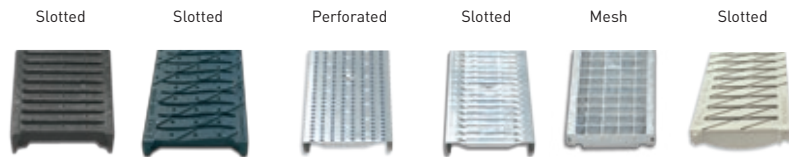


GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX100KCCM	500	123	2
	HEELPROOF SLOTTED	C250	FNHX100KCCM	500	123	2
GALVANIZED STEEL	PERFORATED	A15	GP100KCA	1000	123	1
	SLOTTED	A15	GN100KCA	1000	123	1
	MESH	B125	GEX100KCB	1000	123	1
STAINLESS STEEL	SLOTTED	A15	IN100KCA	1000	123	1
	PERFORATED	A15	IP100KCA	1000	123	1
	MESH	B125	IEX100KCB	1000	123	1
COMPOSITE	HEELPROOF SLOTTED	A15	PNH100KCAM-GRIS (1)	500	123	2

(1) Available in several colors.


LOCKING SYSTEM

SCREW LOCKING SYSTEM. 2 screws per metre.



ACCESSORIES TABLE

END CAPS	Closed
Code	Type
TM100VC	CLOSED




M150

LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type M150: External width 204mm; Internal width 150mm and overall height 80mm to collect rainwater in 1 metre long units. Locking system consists of 2 screws per metre.

MINI

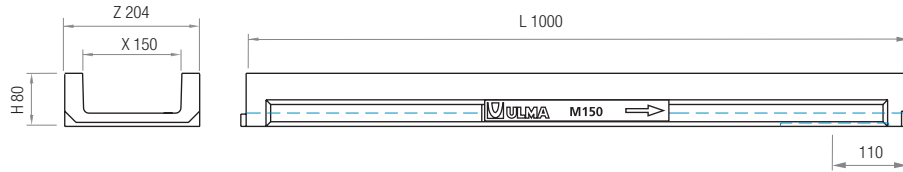

Channel	L (mm)	H (mm)	Width (mm)		Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M150	1000	80	204	150	160	-	89	72

*Vert. outlets on order.

Slotted Slotted Perforated Normal & Heelproof Mesh




GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	B125	FNX150UCBM	500	200	6	2
	SLOTTED	C250	FNX150UCCM	500	200	7	2
GALVANIZED STEEL	SLOTTED	A15	GN150UCA	1000	200	3	1
	PERFORATED	A15	GP150UCA	1000	200	3	1
	MESH	B125	GEX150UCB33	1000	200	2	1
STAINLESS STEEL	HEELPROOF MESH	B12	GEHX150UCB	1000	200	2	1
	PERFORATED	A15	IP150UCA	1000	200	3	1
	MESH	B125	IEX150UCB	1000	200	3	1

LOCKING SYSTEM

SCREW LOCKING SYSTEM. 2 screws per metre.



ASELF200

SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
ASELF200	500	378	204	160/200	160	1	CSELF200

END CAPS	
Code	Type
T150MC	CLOSED

GALVANIZED STEEL BUCKET	
Code	
CSELF200	





M150K

LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type M150K: External width 204mm; Internal width 150mm and overall height 100mm to collect rainwater in 1 metre long units. Integrated galvanized steel* edges for lateral protection. Locking system consists of 2 screws per metre.

*Also available with stainless steel edge protection.

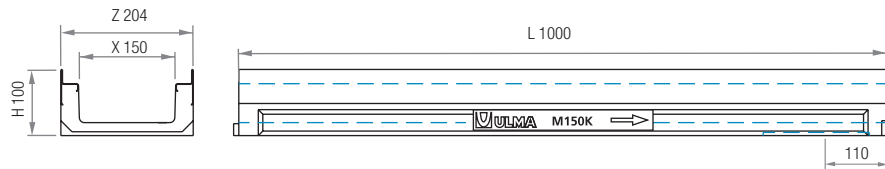

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M150K	1000	100	204	150	160	-	89	60

*Vert. outlets on order.

Slotted



Perforated



Mesh




GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX150KCCM	500	195	2
GALVANIZED STEEL	PERFORATED	A15	GP150KCA	1000	195	1
	MESH	B125	GEX150KCB	1000	195	1
STAINLESS STEEL	PERFORATED	A15	IP150KCA	1000	195	1
	MESH	B125	IEX150KCB	1000	195	1

LOCKING SYSTEM

SCREW LOCKING SYSTEM. 2 screws per metre.



SUMP UNITS AND ACCESSORIES TABLE

ASELF200K



Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
ASELF200K	500	400	204	160/200	160	1	CSELF200

END CAPS

Closed



Code	Type
T150MKC	CLOSED

GALVANIZED STEEL BUCKET

Code
CSELF200




M200

LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type M200: External width 260mm; Internal width 200mm and overall height 100mm to collect rainwater in 1 metre long units. Locking system consists of 2 screws per metre.

MINI

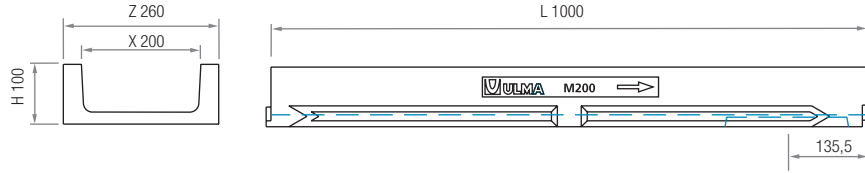

Channel	L (mm)	H (mm)	Width (mm)		Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M200	1000	100	260	200	160	-	157	49

*Vert. outlets on order.

Slotted

Slotted

Normal & Heelproof Mesh




GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX200UCCM	500	250	6	2
GALVANIZED STEEL	SLOTTED	A15	GN200UCA	1000	250	3	1
	MESH	B125	GEX200UCB33	1000	250	2,5	1
	HEELPROOF MESH	B125	GEHX200UCB	1000	250	2,5	1

LOCKING SYSTEM

SCREW LOCKING SYSTEM. 2 screws per metre.



AU200

SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AU200	500	338	260	160/200	-	1	C200

END CAPS

Closed



Code	Type
T200MC	CLOSED

GALVANIZED STEEL BUCKET

Code


C200



M200K

LOAD CLASS
UP TO C250
EN-1433 STANDARD

ULMA Linear Drainage Channel type M200K: External width 260mm; Internal width 200mm and overall height 125mm to collect rainwater in 1 metre long units. Integrated galvanized steel edges for lateral protection. Locking system consists of 2 screws per metre.

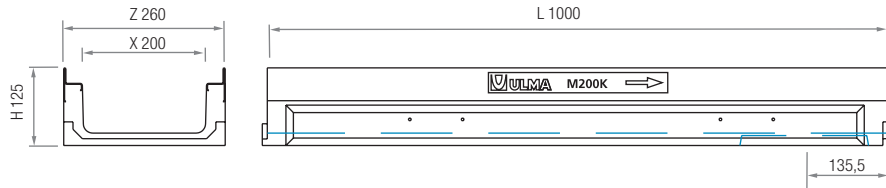


Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M200K	1000	125	260	200	160	-	157	40

*Vert. outlets on order.

Slotted

Mesh




GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FNX200KCCM	500	250	2
GALVANIZED STEEL	MESH	B125	GEX200KCB	1000	250	1

LOCKING SYSTEM

SCREW LOCKING SYSTEM. 2 screws per metre.



AK200

SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AK200	500	363	260	160/200	-	1	C200

END CAPS

Closed




Code	Type
T200MKC	CLOSED

GALVANIZED STEEL BUCKET

Code

C200

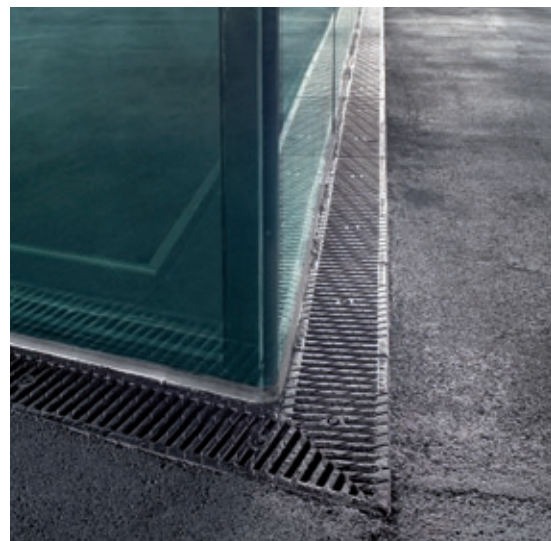


M300

LOAD CLASS
UP TO B125
EN-1433 STANDARD

ULMA Linear Drainage Channel type M300: External width 360mm; Internal width 300mm and overall height 125mm to collect rainwater in 1 metre long units. Locking system consists of locking bar CS300 and screws.

MINI

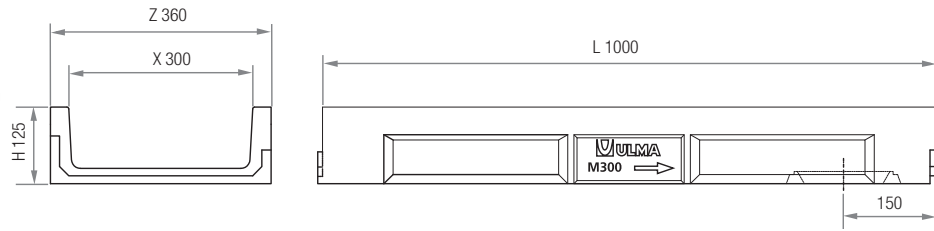

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M300	1000	125	360	300	200	-	294	30

*Vert. outlets on order.

Mesh



GRATING

Material	Design	Load	Code	L (mm)	Width (mm)	Thickness (mm)	Units (x LM)
GALVANIZED STEEL	MESH	B125	GEX300UCB	1000	360	3	1

LOCKING SYSTEM

LOCKING BAR. Two locking bars and two screws per linear metre .



SUMP UNITS AND ACCESSORIES TABLE

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AU300	500	365	360	200	-	1	C300

END CAPS	Closed
Code	Type
T300MC	CLOSED




GALVANIZED STEEL BUCKET
Code
C300



M300K

LOAD CLASS
UP TO C250
EN-1433 STANDARD


ULMA Linear Drainage Channel type M300K: External width 360mm; Internal width 300mm and overall height 150mm to collect rainwater in 1 metre long units Integrated galvanized steel edges for lateral protection. Locking system consists of locking bar CS300 and screws.

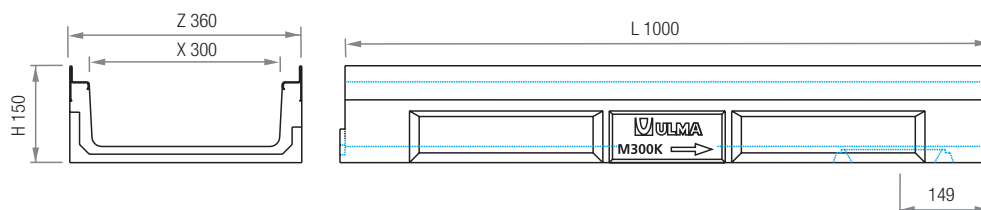

Channel	L (mm)	H (mm)	Width (mm)		Ø Outlet* (mm)		Hydraul. Section (cm ²)	Pcs. / Pallet
			Z	X	Vert.	Hor.		
M300K	1000	150	360	300	200	-	294	24

*Vert. outlets on order.

Slotted Mesh



GRATINGS

Material	Design	Load	Code	L (mm)	Width (mm)	Units (x LM)
DUCTILE IRON	SLOTTED	C250	FN300KCCM	500	351	2
GALVANIZED STEEL	MESH	B125	GEX300KCB	1000	351	1

LOCKING SYSTEM

LOCKING BAR. Two locking bars and two screws per linear metre.



SUMP UNITS AND ACCESSORIES TABLE

AK300

Code	L (mm)	H (mm)	Width (mm)	Ø Outlet (mm)		Sump Units	Bucket
				Lateral	Front		
AK300	500	390	360	200	-	1	C300

END CAPS	
Code	Type
T300MKC	CLOSED

Closed



GALVANIZED STEEL BUCKET	
Code	
C300	

